

#### Overview

SUNTUF® EZ-Glaze offers smart design, elegant glass-like appearance, versatility, low maintenance and sustainable performance. SUNTUF® EZ-Glaze incorporates a proprietary profiled design which enables it to be installed over rafters with a high loading capacity. SUNTUF® EZ-Glaze is easy to fasten; the panels are simply screw fixed to the supportive structure and joined by overlapping.

#### Main Benefits

- Clear and elegant appearance
- Easy, fast and safe installation
- Minimal maintenance
- UV Protection blocks 99.9% of UV radiation
- Greater hail resistance
- High wind and snow load resistance

#### **Typical Applications**


- Pergolas and Gazebos
- Patio enclosures
- Sunrooms
- Carports



# SUNTUF<sup>®</sup> EZ-Glaze - withstands higher loads!

# SUNTUF<sup>®</sup> EZ-Glaze

### Installation Drawing

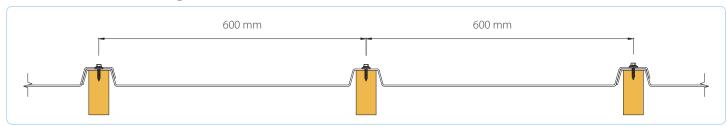


Side Lap

# **Typical Assembly**

#### Centre of Corrugation

Use fixing screw 50mm x 14g with 25mm EPDM washer. Drill 10mm expansion hole into sheet at fixing or use a Clearfix screw (with hole cutter). Set fix points at 500mm apart along sheet crest.

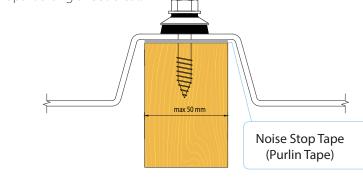

# **Product Availability**

Colours	Solar Grey   Bluish Breeze		
Thickness	3 mm		
Cover Width	1,200 mm		
Maximum Length	7,000 mm		

## **Solar Properties**

	LT (%)	SC*	SHGC**
Solar Grey	20	0.51	0.44
Bluish Breeze	70	0.63	0.55

\*Shading Coefficient \*\*Solar Heat Gain (SHGC)



PALRAM SA/NT 517A Cross Keys Road Cavan SA 5094 Tel: (08) 8262 2288 Fax: (08) 8262 3388 salessa@palram.com

PALRAM NSW/ACT Unit 2, 26 Redfern St. Wetherill Park, NSW 2164 Tel: (02)8788 6100 Fax: (02) 8788 6199 salesnsw@palram.com

#### PALRAM OLD PALRAM VIC/TAS Unit 9C / 380 Bilsen Road Geebung QLD 4034 Tel: (07) 3172 5581 Fax: (07) 3172 5516 salesqld@palram.com

34 Buys Court Derrimut VIC 3030 Tel: (03) 9219 4444 Fax: (03) 9219 4455 salesvic@palram.com PALRAM WA 74 Christable Way Landsdale WA 6065 Tel: (08) 9302 4173 Fax: (08) 9302 5287

**Build On.** saleswa@palram.com

In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with you local Palram Industries supplier to ensure that you have obtained the most up to date information. ©1997 Palram Industries Ltd. | SUNTUF® is a trademark of Palram Industries Ltd.



www.palram.com.au

Wind Uplift: 1.0 kPa Wind Load: 1.0 kPa

apart along sheet crest.

\* Can span on rafters up to 7,000 mm.

## Flammability

SUNTUF® EZ-Glaze complies with the most demanding international fire resistance standards in the field of plastic.

Use fixing screw 50mm x 14g with 25mm EPDM washer.

Drill 10mm expansion hole into sheet at fixing or use a

Clearfix screw (with hole cutter). Set fix points at 500mm

max 50 mm

European Standard: EN 13501 - B s1, d0 \*For more detailed information please contact your Palram distributor.

# Loads Resistance